



DESIGN SOLUTIONS FOR ARCHITECTS AND PLANNERS

Electrical infrastructure for buildings

THE PERFECT SOLUTION FOR SUPPLYING ROOMS WITH POWER AND DATA

There are many different types of rooms that people spend time in. Some are for living in, some for working in, and some for celebrating in or for sleeping in. No matter how rooms are used, they have one thing in common: they must be supplied with power and data. There are always three dimensions for this supply: floor, ceiling and wall. OBO Bettermann is the only manufacturer to offer innovative system solutions for all of these dimensions of electrical infrastructure that harmonise design and function. For points of supply that are flexible over a long period and easily accessible, safe and match visually and technically.



Building Connections

OBO Bettermann is one of the leading manufacturers of installation systems for the electrical infrastructure of buildings and plants. Whenever the perfect flow of power, energy and data is required, that's where architects, planners and craftspeople all over the world rely on the extensive OBO product range. OBO applies its slogan "Building Connections" to more than 30,000 high-quality branded electrical products and services to create application-oriented solutions for projects in industry, business and infrastructure facilities.

Reliable, safe, flexible

OBO's comprehensive product portfolio is organised into three main categories, namely Industrial installations, Building installations, and Safety and protection installations.

The Industrial installations area offers everything required for equipping industrial systems with electrical infrastructure. In the area of Safety and protection installations, fire, lightning and surge protection are of equal importance. The Building installation division offers products for cable management and device installation for administrative and functional buildings as well as architectural solutions. These products are not only characterised by their first-class functionality, but also meet the highest design standards.





DESIGNING THE FUTURE

Today, sustainability is a primary success factor on the marketplace – especially for architects and planners. As a family-run company, we at OBO Bettermann are naturally highly aware of economic, ecological and social values. This includes a commitment to regional locations in our global target markets, in order to shorten the logistical delivery chains, along with certified environmentally friendly production processes, resource-saving measures, innovative solutions as well as long-term economic action. Together with our employees, customers and partners, we continue to develop the globally networked world, shaping the electrical infrastructure of the future with them.



Thinking further. Acting for the long term.

We always act in a sustainable, performance-orientated and transparent manner. Integrity, fairness and diversity are fixed components of our corporate culture. One example: Many invitations to tender require EPDs. By offering Environmental Protection Declarations for individual OBO products, we provide reliable, transparent information on potential environmental impacts. This makes it easier for you to calculate your building's eco-balance, which in turn is required for sustainability certification.

For many of our products, such as cassettes or service outlets, we offer high-quality spare parts. If the need arises, this means it isn't necessary to replace the whole product. Result: The use of our systems is ensured virtually throughout the entire life cycle of the building.

Our premium solutions for surface-mounted installations are also particularly sustainable, as they follow the concept of circular construction. They simplify dismantling and can easily be reused when a building is repurposed.





ALWAYS AT YOUR SERVICE

From flawless logistics through to practical information – we can provide support at every level. Of course, this also includes effective planning aids, typicals and STP/DWG data sets as well as boilerplates that you can simply integrate into your invitation to tender. We can offer additional security through certificates on the conformity of our products with the most important standards and directives. If you have any questions about products, installation or planning, we are happy to provide you with in-person advice and competent support in every phase of the project. This means that you are always on the safe side with OBO.



Smart planning at its finest

When planning electrical installations, time, budget and applicable standards must be taken into account. The OBO Construct planning software supports you with a total of four planning modules: Configure earthing systems, customise underfloor systems, plan fire protection systems that comply with standards and calculate cable assignments for support systems and underfloor ducts and trunking. The individual tools are combined into a central platform, meaning projects can be opened and edited at any time and anywhere – using a smartphone, tablet or desktop PC.

Visions become reality

BIM@OBO allows planners, architects and installation engineers to create BIM-compliant planning for electrical installations – quickly, easily and in a sustainable manner. As a user, you benefit from a completely new BIM offer, tailor-made for your requirements, which offers effective support throughout all the project phases of Building Information Modelling. In addition, the direct integration into your normal planning environment ensures efficient and reliable planning, no matter whether OBO-specific or manufacturer-neutral.



THERE FOR YOU, ACROSS THE GLOBE

The values of our company are supported by continuous proximity to our customers. For us, this means that whenever borders open and new markets are created, we will be there. This regional proximity has proved its worth. OBO operates a global network and employs more than 4,500 people in over 60 countries. The headquarters of the family company, which was founded in 1911, is located in Menden, Germany. In addition, more than 40 subsidiaries are present in markets on all continents.

Think global, act local

As an internationally orientated manufacturer, we offer you a wide range of high-quality products and systems that are not only suitable for use in different types of buildings, but that also meet different national standards and are tailored to the needs of different markets. You benefit from simplified planning of buildings, compliance with national regulations and efficient project realisation. In addition, from OBO you can expect a high degree of flexibility, fast response times for enquiries and the ability to provide large volumes. Practical training courses and technical support that helps you plan and implement projects round off our range of services.




10	OBO BlackLine
14	Underfloor systems
18	Service outlets (GES)
22	Floor Cassette Outlets
28	Round floor sockets (GES R2)
32	Square floor sockets (UDHOME)
36	Open trunking system (OKA)
40	Brush bar trunking system (OKB)
44	Service poles
48	Cable tray systems
52	HoverCube power distributors
56	Dado Trunking
60	Decorative Dado Trunking
64	Electrical Installation Conduits
68	Wiring accessory devices



OBO BlackLine

Elegant, refined, emotional: The colour black is an essential choice for architects. The light-absorbing non-colour shines in every environment, enhancing the ambiance of many different interiors. This use of black is popular particularly in more aesthetically challenging environments, such as exhibition spaces, sales halls or design-orientated offices. Frequently, installations are made on dark backgrounds, meaning that trunking in black, for example, can integrate itself perfectly into its installation environment.

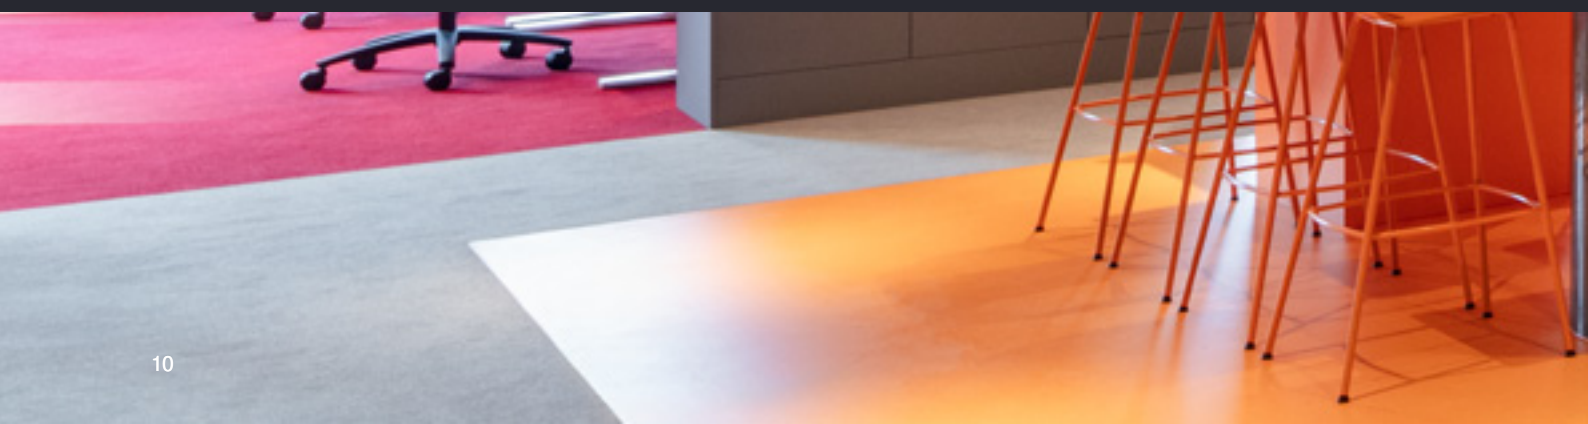





archiproducts® AWARDS WINNER

RKS-Magic® 60 from the OBO BlackLine range has been awarded the Archiproducts® Design Award in the category “Construction”.

OBO BlackLine

At OBO Bettermann, you'll find numerous system solutions for electrical installations with an on trend, premium black finish: for example, the RKS-Magic® cable tray systems – for even more application possibilities that meet the highest of design standards.



UNDERFLOOR SYSTEMS



Underfloor systems provide installation space for power, data and multimedia connections in the floor structure. OBO offers underfloor systems for different building types and floor construction techniques, such as screed, raised floors, cavity floors and country-specific floor structures. Various solutions are available, depending on the application.



Solutions with trunking systems

Service outlets (GES)

The proven solution for office installations with carpeted floors: The GES service outlets are available in plastic or metal and possess countless intelligent details such as cable routing clips, carpet protection frames and a locking lid closure.

Cassettes

The compact cassettes can be adjusted to be flush with the height of the raw floor and, in a special version, to reduce sound emissions. They are particularly suitable for floor coverings such as tiles or parquet. There are various versions for dry, moist and wet-care floor coverings.



Standalone solutions

Round floor sockets (GES R2)

The GES R2 are made from die-cast zinc. Nickel, old copper, chrome and old brass are available as a surface finish. They can be integrated into a wide range of high-quality floor areas.

Floor sockets and floor boxes Square (UDHOME)

The UDHOME system can be mounted as a complete flush-mount unit, flush with any floor type. In the installed state, visible elements are reduced to fine, flush-floor edges and metallic surfaces.

	Variants						External dimension in mm	
	Decouplable	Height-adjustable	Heavy duty	Wet care	Installation height	Number of devices (max)	Round	Rectangular
GES	✓			✓	From 75 mm	3, 6, 9, 12	Ø 234 Ø 294 Ø 324	118 x 194 217 x 217 273 x 220 264 x 264
Cassettes	✓	✓	✓	✓	From 95 mm	6, 9, 12	Ø 214 Ø 274 Ø 304	199 x 199 243 x 243
GES R2	✓		✓	✓	From 85 mm	2	Ø 140	
UDHOME		✓	✓	✓	from 75/95 mm	2, 6, 12		140 x 140 199 x 199 143 x 243

Modul 45® wiring devices

The Modul 45® series provides for maximum variety and flexibility in configuring underfloor systems. Depending on the requirements, sockets and data and multimedia technology can be installed in the floor box using locking technology.



PROPERTIES OF UNDERFLOOR SYSTEMS




Load

DIN EN 50085-2-2 specifies the load requirements for underfloor systems in electrical installations. According to this standard, cassettes/service outlets may only bend by a maximum of 6 mm when subjected to a load. However, with harder floor coverings, such as stone or tiles, bending will lead to breakage. For this reason, OBO has increased its internal quality criteria and goes a step further with the OBO testing standard. The test results from the OBO BET Test Centre formed the basis for the development of the internal classification of heavy-duty classes SL1 and SL2. Products of heavy-duty class SL1 are suitable for loads of up to 10 kN, whilst products of heavy-duty class SL2 are even suitable for loads of up to 20 kN. This can prevent the breaking of hard and sensitive floor coverings such as stone or tiles.



Wet care

All the device installation units for wet-care floors have a protection rating of at least IPX4 when closed, to fulfil the requirements of EN 50085-2-2 without restriction. Device installation units with tube body also protect the electrical installation against the ingress of water when used. The tube body extends 10 mm beyond the top edge of the floor covering, offering protection against the ingress of water into the internal electrical installation.

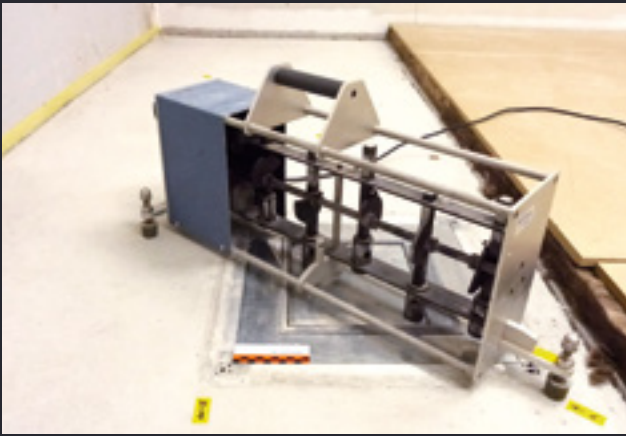

Noise protection

The underfloor systems from OBO are intended for installation in floating screeds. Normally, there are requirements for the transmission of air and footfall sound, both for vertical sound transmission, i.e. from storey to storey, and for horizontal sound transmission (from adjacent rooms). As the underfloor systems are also run under partitions, the question of the influence of the system on noise transmission is of high relevance. For this reason, the air and noise transmission for the EÜK duct and OKA and OKB trunking systems and UDHOME floor boxes were evaluated in qualified tests with the MÜLLER-BBM testing institute in Planegg, Munich.



Planning and selection of the correct underfloor system

The following floor structure requirements must be considered:

- Installation requirements
- Requirements from architectural construction planning
- Organisational requirements and user specifications
- Safety requirements

Accordingly, the correct selection of the duct or trunking system is of key significance for technical planning. Besides personal project advice, the OBO service also includes the OBO Construct software, offering a fast, targeted planning tool for underfloor systems. (www.obo-construct.com).



Standards for underfloor systems

These can be divided into two categories: installation specifications and product standards. The installation engineer is primarily responsible for compliance with the installation specifications.

The product standard EN 50085-2-2 specifies the testing criteria for underfloor systems. The OBO Bettermann underfloor systems meet this standard and are VDE-certified.



Fire protection in underfloor systems

OBO Bettermann underfloor systems can be run in escape and rescue routes and through fire walls. In doing so, special requirements need to be taken into account in the installation and system selection.



SERVICE OUTLETS (GES)

VERSATILE FLOOR OUTLETS

Service outlets act as the installation space in the floor for devices such as sockets, data boxes and multimedia connections. As discreet, flexible solutions, they can be installed in system floors as well as in screed-flush and screed-covered underfloor systems. Versions made of plastic, aluminium and stainless steel can be installed in an accentuated or complementary manner in a range of floor coverings.





Gelsenwasser office




CHECK SERVICE OUTLETS (GES)

What are the basic types?

With floor covering recess




Rectangular with
handle clamp



Rectangular with
locking slider




Round with
handle clamp



Round with
locking slider



Round with
tube body



Round with
tube body and
structured lid

**With decorative
cover**

How many installation devices can be installed in service outlets?



2x BS Sw/Sockets
3x Modul 45°
External dimension
118 x 194 mm




4x BS Sw/Sockets
6x Modul 45°
External dimension
222 x 222 mm



6x BS Sw/Sockets
9x Modul 45°
External dimension
297 x 221 mm



6x BS Sw/Sockets
12x Modul 45°
External dimension
243 x 243 mm



BS APMT5 sockets




4x BS Sw/Sockets
6x Modul 45°
External dimension
Ø 234 mm



6x BS Sw/Sockets
10x Modul 45°
External dimension
Ø 294 mm



6x BS Sw/Sockets
12x Modul 45°
External dimension
Ø 324 mm



BS APMT5 sockets




What is the minimum floor structure height requirement?

GES service outlets can be installed with devices from 75 mm for raised floor and 85 mm for screed floor applications.




What types of floor care are possible?

The different construction types of the service outlets allow dry, moist or wet care. Products for wet care are also suitable for mechanical floor cleaning. With wet-care floor coverings, current requirements (from DIN EN 50085-2-2) mean that service outlets with tube body are to be used for device installation.

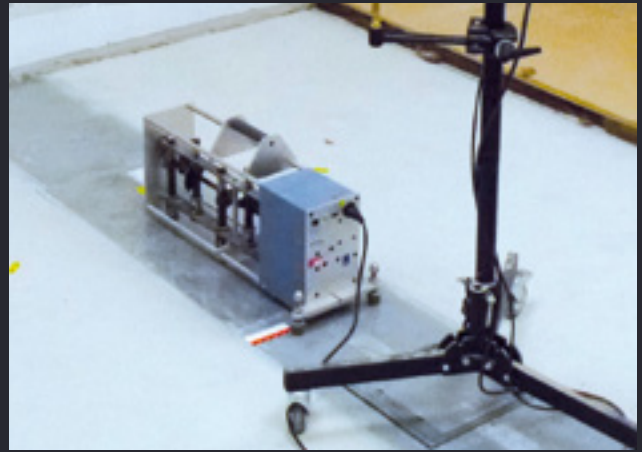

Can noise transmit in an underfloor system?

An underfloor trunking system forms part of the overall floor construction and it is possible for noise to transmit. OBO Bettermann have intensively researched noise transmission and have developed a comprehensive system to eliminate footfall/impact sound and minimise air sound transmissions. Therefore OBO service outlets will be installed in decouplable screed floor boxes to avoid sound emissions within screed floor constructions.

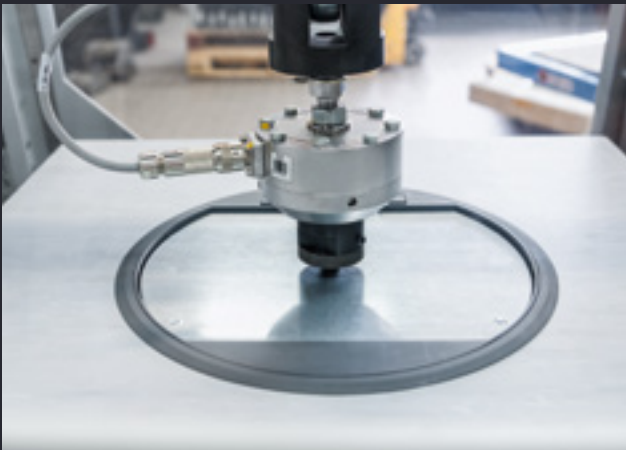

What are the load capacities of the service outlets?

For plastic service outlets, we recommend point loads up to 2,000 N (200 kg). For metal service outlets, we recommend point loads up to 3,000 N (300 kg).



Which floor covering is suitable for the product?

All types of carpet, plastic floor covering or thin floor covering requiring the protection of cut edges.



Car showroom,
Güterlosh

CASSETTES

ROBUST ELEGANT, FLUSH FLOOR

Whether it's retail, commercial, living, event or showroom space, the new generation of trimless OBO cassettes offer an elegant and robust solution to provide power and data connectivity to any point of the floor. This premium cassette solution forms part of the overall underfloor system in many high-quality buildings.



Car showroom,
Güterlosh





CASSETTES

DISCREET ALL-ROUNDER

Joint-free floor areas, such as terrazzo flooring, are en vogue in modern interior architecture. As the sole provider on the market, OBO can offer a special underfloor solution, in order to integrate the access points to the electrical installation seamlessly into the floor area.





EXCLUSIVE TO
OBO



Sennheiser Foyer




Haus der Zukunft – Futurium Berlin


CHECK CASSETTES

What are the basic types?

With floor covering recess

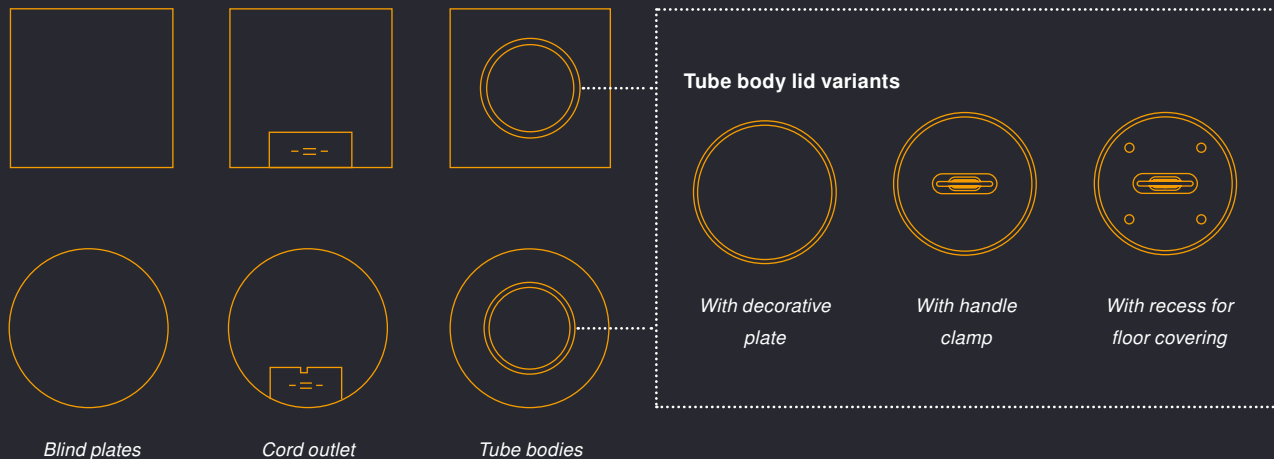

How many installation devices can be installed in the cassettes?

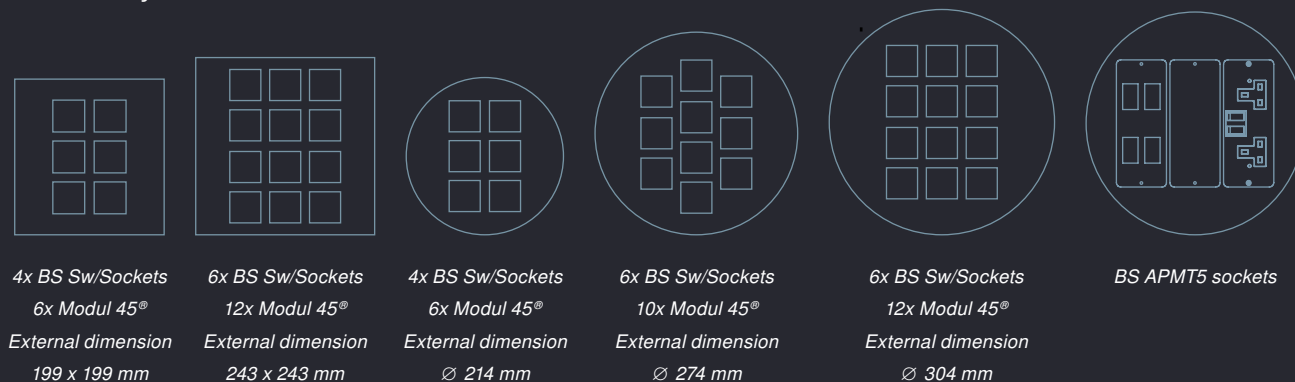

What is the minimum floor structure height requirement?


Height-adjustable cassettes with device installation can be installed for floor heights from 105 mm. Inspection cassettes without device installation can be installed in a floor height of 100 mm or more.

Specially decoupled and height-adjustable cassettes for screed installation can be installed from floor heights of just 90 mm, including device installation.



What types of floor care are possible?

The different construction types of the cassettes allow dry, moist and wet care and are also suitable for floors requiring mechanical cleaning. With wet-care floor coverings, requirements (from the DIN EN 50085-2-2) mean that cassettes with tube body are to be used for device installation.

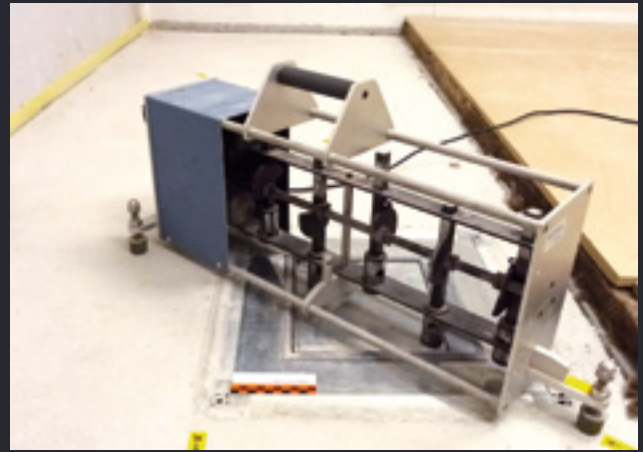

Can noise transmit in an underfloor system?

An underfloor trunking system forms part of the overall floor construction and it is possible for noise to transmit. They can be installed in screed floors or in system floors and wooden beam ceilings. The OBO Bettermann decoupled, height adjustable cassette solution helps to ensure that noise transmission in insulated floor systems is eliminated.




What are the load capacities of the cassettes?

Standard cassettes for use in buildings with normal load requirements are designed for traffic loads of up to 3,000 N – according to the requirements of EN 50085-2-2. For high load requirements, such as those in car dealerships, airports or railway stations, there are heavy-duty cassette solutions designed for loads up to 20 kN (2,000 kg). These values are tested according to the heavy-duty classification OBO SL.



Which floor covering is suitable for the product?

Stone, marble, tiles, parquet, wooden floorboards or other cut-resistant and thicker floor coverings. However, Terrazzo (ground) is also available in a special application. You will find more information on underfloor systems for jointless floors here:





ROUND FLOOR SOCKETS (GES R2)

SMALL ALL-ROUNDER

Sleek design, high-quality material, extreme load capacity: The GES R2 is used anywhere where only small, supply points are required in the floor. The modular structure of height-adjustable screed socket, installation socket and lid allows a variety of uses of the round floor socket, from private accommodation through to car dealerships.



CHECK ROUND FLOOR SOCKETS (GES R2)

What are the basic types?




*Hinged cover with
locking slider*
External dimension
Ø 140 mm



*Tube body with
handle clamp*
External dimension
Ø 140 mm



Blind plates
External dimension
Ø 140 mm



*Hinged cover with
cord outlet flap*
External dimension
Ø 140 mm



Blind plates
External dimension
Ø 140 mm


How many installation devices can be installed in GES R2 service outlets?



2x Modul 45®
2x data technology



1x BS Single Sw/socket
1x Data outlet

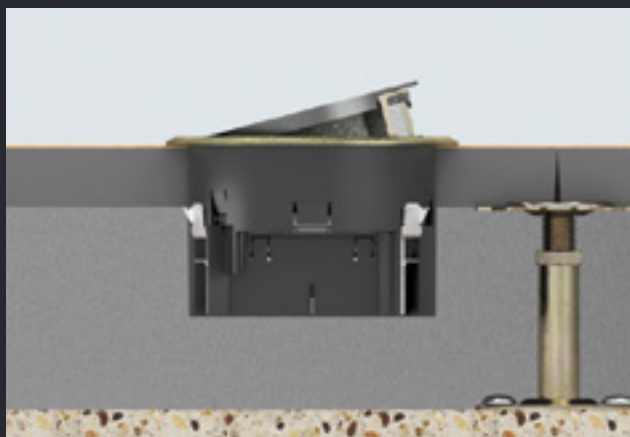

What is the minimum floor structure height requirement?

The minimum installation height from the top of the finished floor is 85 mm. Installation can take place in screed constructions or in raised and cavity floors. The installation diameter for the round floor socket is 120 mm.

In screed constructions, installation takes place in a height-adjustable screed socket with a height-adjustment range of 85 to 130 mm via simple 3-point height adjustment. A further height increase with accessories is also possible.



What are the load capacities of the GES R2 service outlets?

They fulfil the EN 50085 2-2 standard and are designed for high load requirements of up to 20 kN.



What types of floor care are possible?

The tube body lid seals the closed installation space against the ingress of water, which occurs, for example, when the floor is cleaned. If the tube body cover for the cable outlet is open, it extends 10 mm beyond the top edge of the floor covering, offering protection against the ingress of water into the internal electrical installation. The GES R2 with tube body fulfils the requirements for service outlets in wet-care floors according to EN 50085-2-2. In addition, when completely closed, the GES R2 with hinged lid fulfils the requirements of EN 50085-2-2 for use in wet-care rooms.

What colour does your design require?

The GES R2 is suitable for all floor coverings. It is available in these finishes:

Metal variants

- Nickel
- Brass
- Chrome
- Copper
- Nickel-oxidised
- Black

Plastic variants

- Iron grey
- Graphite black





SQUARE FLOOR SOCKET OUTLETS (UDHOME)

CLEAN AND AND DISCREET

In a museum, in a foyer, in an event room, in high-quality housing: UDHOME is at home everywhere. The system is characterised by a clean and discreet appearance. It can be installed flush with the finished floor. Six new contemporary decorative designs and an optional brush outlet make it possible to harmoniously integrate with individual room designs or retrospectively with many existing floor coverings.






CHECK SQUARE FLOOR SOCKETS (UDHOME)

What are the basic types?


UDHOME-ONE & UDHOME2




Hinged cover with floor covering recess and cord outlet



Hinged cover with decorative plate and cord outlet



Hinged cover with decorative plate and brush cord outlet



Hinged cover with floor covering recess and brush cord outlet



Decorative cover made of stainless steel with tube body outlet

UDHOME4



Cover with floor covering recess and cord outlet

UDHOME9



Cover with floor covering recess and cord outlet

How many installation devices can be installed in UDHOME?

UDHOME-ONE



1x Modul 45°




1x BS Single Sw/socket
1 x Data outlet

External dimension
140 x 140 mm

UDHOME2



2x Modul 45°



1x BS Single Sw/socket
1 x Data outlet


External dimension
140 x 140 mm

UDHOME4



6x Modul 45°

External dimension
199 x 199 mm




4 x BS Sw/sockets

UDHOME9




12x Modul 45°

External dimension
243 x 243 mm



6 x BS Sw/sockets

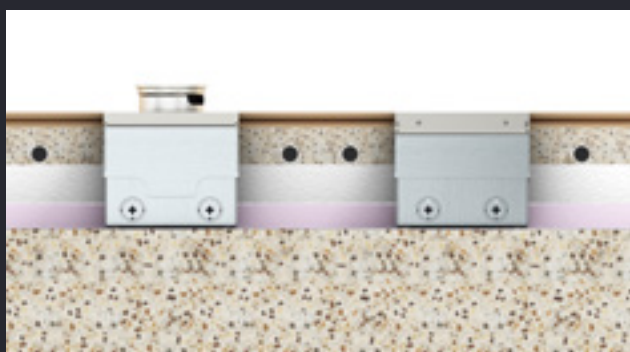

What is the minimum floor structure height requirement?

The UDHOME-ONE floor sockets can be installed from a floor height of 75 mm. The UDHOME2 floor socket and the UDHOME4 and UDHOME9 floor boxes require a minimum floor height of 95 mm. All UDHOME variants have an internal height-adjustment unit (+30 mm). This enables them to be adjusted flush to the finished floor level. Height extensions for large floor sockets are available as accessories.



What is the load capacity of the UDHOME?


The UDHOME ONE and UDHOME2 with tube body is designed for high loads up to 15 kN and also suitable for heavy-duty applications. The UDHOME4 and UDHOME9 are designed for loads of up to 3 kN and can be used for all normal applications with sufficient reserve. All the UDHOME solutions fulfil the standards of EN 50085-2-2.

What types of floor care are possible?

The UDHOME2 tube body version is suitable to be used with wet care cleaning. The UDHOME ONE, UDHOME4 and UDHOME9 are only suitable for dry and moist care.

DECORATIVE COVER VARIANTS


Stainless steel

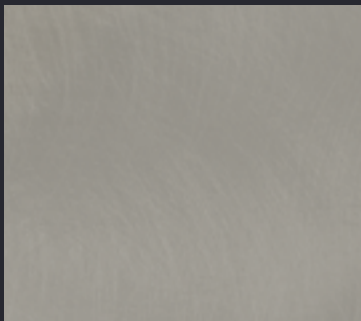

Angelhair




Spots

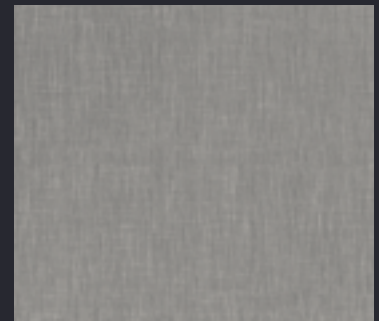


Cross hatch


Brass

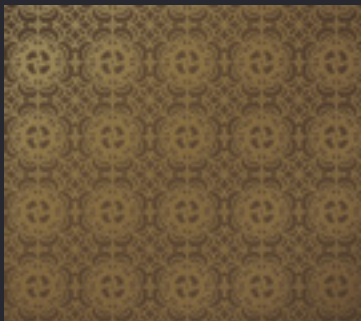

Marygold

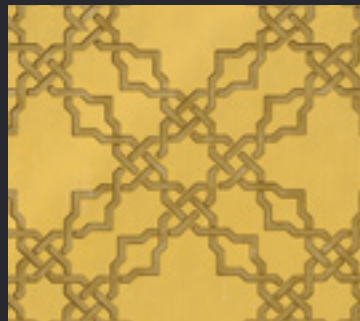

Oriental

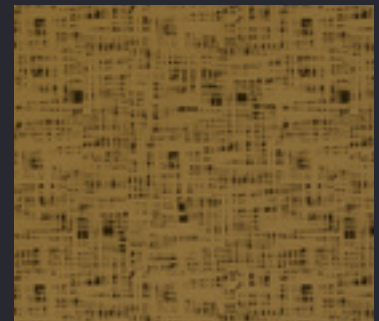

Hammer blow

Which floor covering is suitable for the UDHOME?

The products of the UDHOME series are suitable for all cut-resistant floor coverings, such as stone, tiles, parquet, wooden floorboards and also Terrazzo in special applications. The floor covering recess in the lid of the UDHOME series allows for a maximum floor covering thickness of up to 15 mm.



FLUSH FLOOR TRUNKING SYSTEM (OKA)

FLEXIBLE AND FUTURE-PROOF

The OKA flush floor trunking system is an extremely flexible and versatile underfloor solution that provides power and data to all required floor locations. The system can be used with many different service outlet and floor covering options. Removable trunking covers allow for an easy installation and provide access for any future end-user adaptations.





CHECK OPEN TRUNKING SYSTEM OKA

What are the basic types?

OKA-G




Dimensions

Trunking widths: 200, 300, 400, 500, 600 mm

Trunking height: 40–240 mm infinitely height-adjustable

OKA-W

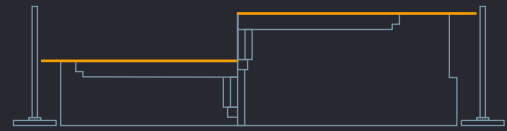

Dimensions


Trunking width: 200, 300, 400, 500, 600 mm

Trunking height: 40–70 mm; 60–110 mm; 100–150 mm



How is the trunking system routed?

The screed-flush trunking of the OKA system is mounted directly on the raw concrete and adjusted to the finished screed level. Two trunking variants are available and can be easily combined: The OKA-G has flexible metal mesh side walls, that can be easily adapted to accommodate any uneven substrate levels. The OKA-W has a metal floor trough that provides EMC segregation for power and data services.

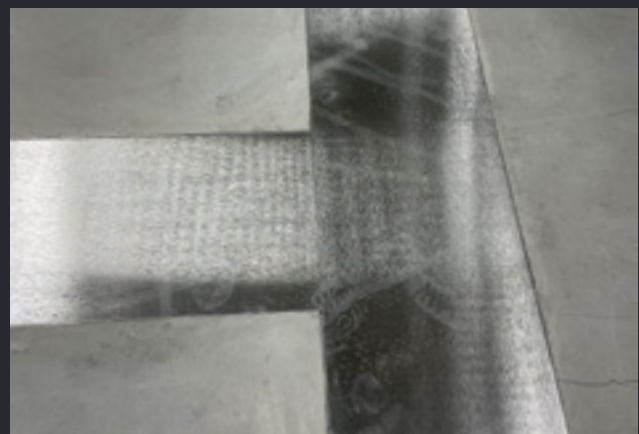

What is the minimum floor structure height requirement?

The system can be installed as a trunking system in low floor construction heights from 40mm. For floor structures of 75mm and above, service outlets can be installed.

What types of floor care are possible?

The trunking system is suitable for dry, moist and wet-care floor coverings.



What are the load capacities of the flushfloor trunking?

The flushfloor trunking system is characterised by its high load capacity. All the covers have a metal thickness of 4 mm. The trunking covers are additionally supported with struts at the joints preventing any significant bending even with large trunking widths. Installed flush with the floor, the trunking is designed for normal traffic loads in large office spaces (3.0 kN point load). However, special versions for traffic loads up to 15 kN are also possible.



Which floor covering is suitable for the trunking system?

The system is ideal for flexible floor coverings such as carpet, PVC, LVT or linoleum. For thicker floor coverings such as stone, tiles, wood or laminate, there are also trunking covers with cassette supports to accommodate these floor coverings.



How does the trunking system perform with regard to noise transmission?

The OKA trunking system fulfils the noise protection requirements for civil engineering. Should there be requirements for increased footfall sound protection, then noise protection insulation should be added to the system in the area of the partition.

Qualified tests to determine the transmission of air and footfall sound for the OKA trunking system were carried out together with the MÜLLER-BBM GmbH testing institute in Planegg, Munich.



What devices can be used in the trunking system?

The two trunking variants, OKA-W and OKA-G, are suitable for the installation of various service outlets. Depending on the furnishing plan and planned use, service outlets for the installation of six, nine or twelve individual devices from the Modul 45® series can be selected. This optimised system offers space for sockets, data boxes and multimedia connections, such as HDMI or USB.



BRUSH BAR TRUNKING SYSTEM (OKB)

DISCREET TRUNKING SYSTEM

The OKB trunking system from OBO runs along the windows and walls and can only be identified by a narrow, continuous brush bar, which provides a unique, discreet and flexible cord outlet facility. The trunking system fits flush to the floor and can be covered with the finished floor covering, providing a seamless floor finish in any interior.






CHECK BRUSH BAR TRUNKING SYSTEM

OKB


What are the basic types?

Trunking unit with brush bar




Side view
85 x 250 mm

Internal corner with brush bar




Top view
421 x 421 mm

External corner with brush bar



Top view
423 x 423 mm

Trunking unit with blanking lid



Side view
85 x 250 mm



What height of floor structure is required?

The floor structure from the top edge of the raw floor to the top edge of the finished screed must be at least 85 mm up to a maximum of 333 mm. The maximum floor covering thickness that can be used with the OKB system is 25 mm.

What types of floor care are suitable?

The trunking system is suitable for dry or moist-floor cleaning methods.



What are the load capacities of the brush bar trunking?

The trunking system has a point load capacity of up to 3,000 N (300 kg).



How does brush bar trunking perform with regard to noise transmission?

The OKB brush bar trunking system can be installed around the perimeter of any room. By installing the brush bar trunking system no relevant impact of footfall noise transmission is generated. In the case of wall penetrations through partitions with noise protection requirements, noise protection insulation should be installed as required. The air and footfall noise transmission for the OKB brush bar trunking system was tested in a qualified manner by the testing institute MÜLLER-BBM GmbH in Planegg, Munich.



How should the OKB brush bar trunking system be installed?

The OKB system should be mounted on the raw concrete slab before any screed work is carried out. It can run along the windows and walls for the entire length of the room. The practical accessories of the OKB system allow routing into any corner of the room. Appropriate prefabricated internal and external bends ensure uncomplicated mounting. The system can be adjusted exactly to the planned screed height using the height-adjustment feet.



What floor coverings are suitable for the system?

The trunking system is suitable for all cut-resistant floor coverings such as parquet and plastic coverings with thicknesses up to 25 mm.

SERVICE POLES

FLEXIBILITY FOR POWER AND DATA IN OPEN SPACES





CHECK SERVICE POLES

What are the different types?



Floor service pole



Floor-ceiling service pole

What profiles are available?

Floor service poles *




Square

212 x 212 x 680 mm



Rectangular

250 x 220 x 564 mm




Rectangular

130 x 140 x 500 mm



Oval

146 x 65 x 675 mm



Oval

130 x 80 x 675 mm




Round

Ø 70 x 675 mm


** All profiles are available in steel or aluminium.*

Floor-ceiling service poles *




Rectangular

115 x 75 x 2,505 mm




Oval

65 x 146 x 3,000 mm




Rectangular

110 x 70 x 3,000 mm




Rectangular

140 x 110 x 3,000 mm



Round

Ø 80 x 2,300 mm



Oval

130 x 80 x 3,000 mm



Round

Ø 70 x 3,000 mm

** All profiles are available in steel or aluminium.*



How are floor-to ceiling service poles fastened?

Floor-to-ceiling service poles are clamped between the floor and ceiling with a special spring tension device. This guarantees stability of the pole and torsion protection as required by the standard.



Which materials are used to manufacture the service poles?

OBO service poles are manufactured from extruded 6,000 series aluminium which carries many properties such as being lightweight, stable, highly resistant and have a long life span. The service poles are powder coated or anodised in a matt finish, to provide a sophisticated surface finish that's aesthetically pleasing and compliments many interior finishes. The service poles are therefore given an anodising layer, a surface method which achieves an even matt finish.



What are the benefits of using a desk height service pole?

Creating office space with an open view is paramount within today's commercial space design. The OBO Bettermann desk height, service pole is the perfect solution to provide power and data whilst eliminating any obtrusive obstructions, thus providing a clear and open space view.



PSV stadium Eindhoven

CABLE TRAY SYSTEMS

INDUSTRIAL CHARM

Open ceilings, a raw industrial look – this is the home of the Magic® cable tray systems. Sleek, functional and incredibly robust, they make a contribution to a technically purist interior in modern offices, retail outlets, apartments, restaurants and bars, hotels and cafés. The special thing about the Magic® cable tray systems is their patented fast fix coupling system. The different surface properties of the RKS, MKS and SKS Magic® make these cable trays usable in all kinds of applications internally or externally.



BrezelMuseum, Erdmannhausen



CHECK CABLE TRAY SYSTEMS

What are the basic types?


Perforated cable tray



RKSM 35



RKSM 60
MKSM 60
SKSM 60




MKSM 85
SKSM 85



MKSM 110
SKSM 110


Unperforated cable tray



MKSMU 60
SKSMU 60



MKSMU 85
SKSMU 85



MKSMU 110
SKSMU 110

- RKS** Efficient cable tray system
- MKS** Medium-duty cable tray system
- SKS** Heavy duty cable tray system

Which variants are available?

Type	Side height in mm	Width in mm							FS Strip galvanised	FT Hot-dip galvanised	A2 Stainless steel	A4 Stainless steel
		100	150	200	300	400	500	600				
RKSM	35	✓		✓	✓				✓			
	60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MKSM	60	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	85	✓		✓	✓	✓	✓	✓	✓	✓		
MKSMU	110	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓*	
	60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓*	
	85	✓		✓	✓	✓	✓	✓	✓	✓		
SKSM	110	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓*	
	60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓*	✓*
	85	✓		✓	✓	✓	✓	✓	✓	✓		
SKSMU	110	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓*	
	85	✓		✓	✓	✓	✓	✓	✓	✓		
	110	✓	✓	✓	✓	✓	✓	✓	✓	✓		

*Not available in the width 150 mm.

What additional fittings exist?

RB 45 45° bend	RB 90 90° bend	RB W Variable bend	RGBEV Adjustable bend element	RAA Add-on tee	RT T piece	RK Cross-over



Is powder coating possible?

Powder coating is possible in all RAL shades. Besides the visual accents through colour and structure, the appropriate coating can, depending on the powder, also provide increased corrosion protection and the best insulating properties.



How much safety is guaranteed?

Mechanical safety

The patented coupling system provides a clear transition through the joint whilst supporting maximum loads, and mechanical and vibration protection. The cable tray systems are subjected to load tests at our BET Test Centre. The basic principles for the tests of OBO cable support systems are carried out in accordance with DIN EN 61537 and DIN VDE 0639.

Electrical safety

Equipotential bonding is also guaranteed without additional components. The cable trays are tested for EMC and impulse currents and are VDE-tested to DIN EN IEC 61537:2007.

Safety in the event of fire

The RKSM cable tray in the width of 100–400 mm is tested for the maintenance of electrical function in the event of a fire according to DIN 4102 Part 12. It can withstand fire for 90 minutes with a load-bearing capacity of 20 kg/m cable weight.

What requirements do the cable tray systems meet?

Whether indoors or outdoors, in aggressive atmospheres or under special hygienic conditions: The cable tray systems can offer the perfect surface and materials for your cable support system, no matter what the requirements may be.

Cable trays, fittings and accessories are machined from high-quality sheet steel and are available with various surfaces. Different hardening or coating methods ensure tailor-made corrosion protection, specially tailored to the appropriate application.



HOVERCUBE

VERSATILE POWER & AIR DISTRIBUTION


With the space-saving type VH and VHF HoverCubes, unsightly and problematic extension cables and hoses are a thing of the past. The compact suspended distribution units can be suspended from the ceiling and thus freely positioned in the room. They ensure flexible power, data, multimedia and the option of compressed air to many workplaces inc, industrial workshops, school classrooms, science laboratories, museums and office areas. The housings of the Hovercube"s are made of highly resistant polyamide and provide the versatility of up to eight multi functional outlets.






CHECK HOVERCUBE

Which variants are available?



With compressed air, square design, dimensions for max. four devices



Without compressed air, square design, dimensions for max. four devices



With compressed air, rectangular design, dimensions for max. eight devices



Without compressed air, rectangular design, dimensions for max. eight devices





What devices can be used in the HoverCube?

Up to two devices from the OBO Modul 45® series can be installed on each connection side. Different circuits can be installed in the housing. The entire product range of international sockets is available. CEE 16 A and CEE 32 A sockets can be installed in the power supply units. The entire OBO Modul 45® range for data and multimedia technology is suitable for the network connection of machines and systems and in seminar and training rooms.

How are HoverCubes installed?

Cables are inserted in the HoverCube via penetration sleeves. Integrated strain relief options in the housing ensure standardised installation. Suspension takes place in a fixed manner with a chain, with a spring or ergonomically with the retractable positioner.

Are HoverCubes available with increased IP protection?

The VHF8 HoverCube is specially designed for use in moist and wet areas. In the unused state, the housing equipment and the devices offer a protection rating of IP44.

WALL TRUNKING SYSTEMS

STRAIGHT DESIGN LANGUAGE

Practical, versatile, flexible – Rapid wall trunking. Various versions and countless fittings bring all kinds of supply connections to the wall exactly where they are required. The two different sizes can be equipped as required with standard or Modul 45® sockets and adapted perfectly to the appropriate room requirements.

Depending on requirements, versions in plastic, aluminium or steel are available. The halogen-free and antibacterial variants are suitable for special safety requirements. The trunking made from metal can be powder-coated in all RAL colours.





CHECK WALL TRUNKING

What are the basic types?



 45 mm system opening



 80 mm system opening

Which variants are available?

Rapid 45

1 Single-compartment **2** Two-compartment **3** Three-compartment


Material		Trunking height in mm	Trunking width in mm	RAL 9010 Pure white	RAL 7035 Light grey	Anodised	Special colour
Plastic	1	53	100	✓	✓		
Plastic	2	53	130	✓	✓		
		53	165	✓	✓		
Plastic	3	53	160	✓	✓		
Aluminium	1	53	100	✓		✓	✓
Aluminium	2	53	130	✓		✓	✓
		53	165	✓		✓	✓

Rapid 80

Material		Trunking height in mm	Trunking width in mm	RAL 9010 Pure white	RAL 9001 Cream white	RAL 7035 Light grey	RAL 7030 Stone grey	Anodised	Special colour
Plastic	1	70	110	✓	✓	✓	✓		
			130*	✓	✓	✓	✓		
			170*	✓	✓	✓	✓		
Sheet steel	1	70/90	110	✓					✓
			130	✓					✓
			170	✓					✓
			210	✓					✓
Sheet steel double trunking	2	70/90	170	✓					✓
			210	✓					✓
Aluminium	1	70	110	✓				✓	✓
			130	✓				✓	✓
		90	130	✓				✓	✓
		70	170	✓				✓	✓
Aluminium double trunking	2	90	210	✓				✓	✓

* Available in halogen-free version

What additional fittings exist?

							
External corner Variable	External corner	T piece adapter	End piece	Internal corner Variable	Internal corner	Flat angle	Flat angle cover

Matching fittings are available for all variants of the skirting trunking.



How can noise transmission be reduced?

In modern office buildings, wall trunking is often run through office partitions, creating a connection between multiple offices. It is possible that noise may be carried through the trunking penetration. To prevent air conduction of noise, the free cross-section of the trunking should be filled with noise insulation after cabling, e.g. air noise barrier, type 7 LSB. The same applies to any gaps between the trunking and the adjoining wall. When used correctly, the air noise barrier, type 7 LSB, can achieve attenuation of up to 40 dB.



Why does OBO offer halogen-free wall trunking?

From a fire protection perspective, halogen-free installation materials are a safe choice. Manufactured completely from halogen-free plastics, if there is a fire, they reduce the amount of toxic smoke gases and the formation of corrosive substances.



Connectable device installation for Rapid 45

Modul 45connect stands out through its innovative European socket and adapter components and offers numerous application options. The connection adapter, with which sockets can be arranged easily, creates a high level of flexibility. Thus, it is possible to create multi-socket combinations without the need for additional wiring. Combinations with a maximum of two connection adapters are tested and VDE-approved. 4x to 9x socket combinations can be created easily.



DECORATIVE WALL TRUNKING

COMBINING POWER WITH SOPHISTICATION

Purist on the outside, spacious on the inside: The GAD Design device installation trunking hides connectors, cables and power supply units behind pure anodised aluminium. The covers are available in straight, convex and curved versions and can be locked in the opened state as required. LED lighting strips can be applied to the trunking to create attractive effects. Whilst illumination of the interior simplifies the handling of cables and connectors, lighting mounted on the underside of the trunking can highlight the structure or colour of the wall.








CHECK DECORATIVE WALL TRUNKING

What are the basic types?

Style



*Rectangular
Side view*

Soft



*Convex
Side view*


Swing



*Curved
Side view*

What versions are available?

Trunking height in mm	Trunking width in mm	Aluminium	Anodised
140	2,000	✓	✓

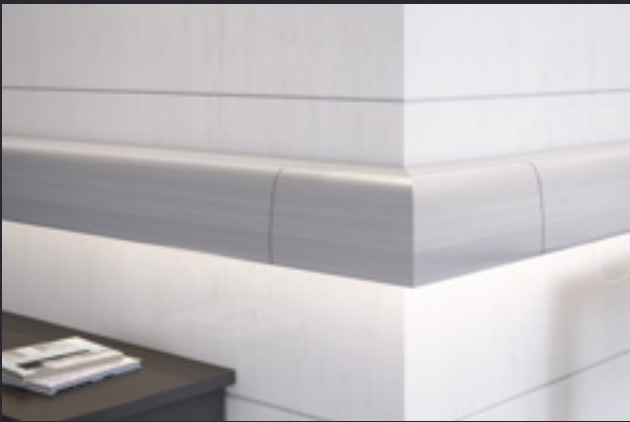

What are the advantages of the design?

The GAD Design device installation trunking permits cable routing and device installation in a high-quality environment. With this trunking system, requirements for electrical services can be fulfilled almost invisibly. Connectors, power units or data/network connections disappear behind a hinged cover.

What are the benefits of an anodised surface?

During anodising, metal surfaces are oxidised electrically creating a hard, scratch-resistant surface. Compared to other treatment methods, this creates reliable protection against corrosion and provides a sleek aluminum look.



ELECTRICAL INSTALLATION CONDUITS

RUGGED YET REFINED

From refineries to existing buildings, from the workshop to the office – installation pipes are sleek, versatile and robust. With their minimalist and technical charm, they ensure a different type of supply in modern facilities. Available in various colours, the precision-lasered welded pipes are suitable anywhere where a professional surface-mounted installation is required and space for design elements is given.





CHECK ELECTRICAL INSTALLATION CONDUITS

What components are available?

With thread




Without thread




Extension and connection pieces




90° pipe bend
with and without thread




Sleeve with and
without thread
(Internal thread)



Control T piece with and
without thread (internal thread)
IP54 protection rating



Metal clips



Plastic clips

Which variants are available for the pipes?

Pipe diameter in mm							Length in mm*
16	20	25	32	40	50	63	3,000

**The length of the pipes can be shortened to fit exactly.*

Which surfaces are available?

The precision-lasered welded electrical installation conduits are available in various materials and with various surfaces. They are suitable for surface-mounted installations for safe cable routing.

The following surfaces are available:

- Stainless steel
- Aluminium
- Steel, galvanised
- Steel, black powder-coated







MODUL 45® DEVICES

TAILOR-MADE SOLUTIONS


The devices of the Modul 45® series, with a dimension of 45 x 45 mm, provide a large benefit in the smallest space. As connections for power, data and multimedia applications, they are compatible with all underfloor systems, service poles and wall trunking. They are available in the colours white, grey, aluminium, black-grey, pure orange, signal red and mint green.






CHECK MODUL 45[®] DEVICES


Which variants are available?




*Protective contact
and earthing pin
sockets*




*Country-
specific sockets*



Switching devices



Data technology



*Multimedia
technology*



Which solutions does the system offer?

The Modul 45[®] devices offer the right solution for every application – no matter whether you require sockets, USB and data or multimedia technology.

- Multiple sockets for economic device installation
- Sockets for international applications
- Modul 45[®]connect as a completely connectable variant of installation solutions
- Data technology supports for data modules of different manufacturers
- Multimedia connection solutions for data, video and audio transmission
- Pre-wired sockets (EU) for efficient installation

Connectable connection technology
Modul 45[®]connect

OBO Bettermann offers the connectable connection technology right through to the socket. This allows pre-terminated cables to be connected directly to the socket or via adapters. Whether directly or with conventionally connected adapters, the installation time can be made considerably reduced. The plug and play system is extremely flexible and allows for any upgrades or changes to be made easily in the future.





Trench Ltd

Telephone Number: +44 (0) 121 544 7011

Website: www.trenchltd.com

E-mail: sales@trenchltd.com

© OBO Bettermann 04/2026 EN